

FIG 1

FIG. 2 is a side view of the device of FIG. 1, showing the device in a retracted position. The device includes a base 10, a handle 12, a spring 14, a plunger 16, a piston 18, a rod 20, a sleeve 22, a cap 24, a seal 26, a gasket 28, a ring 30, a flange 32, and a nut 34.




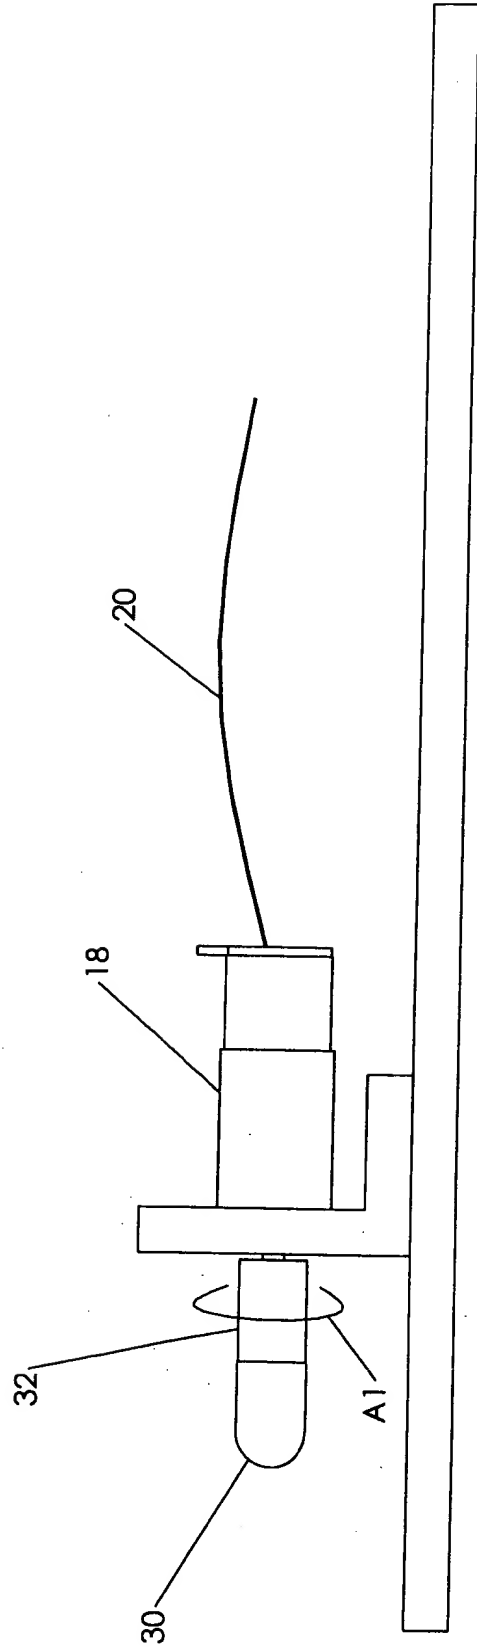


FIG 2

Bullet A

Bullet B

Composite
A - Left B - Right

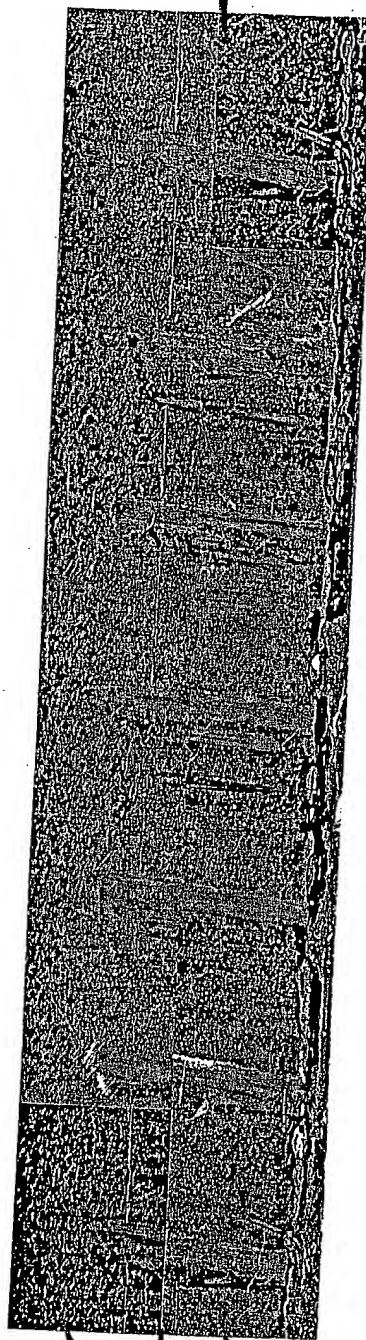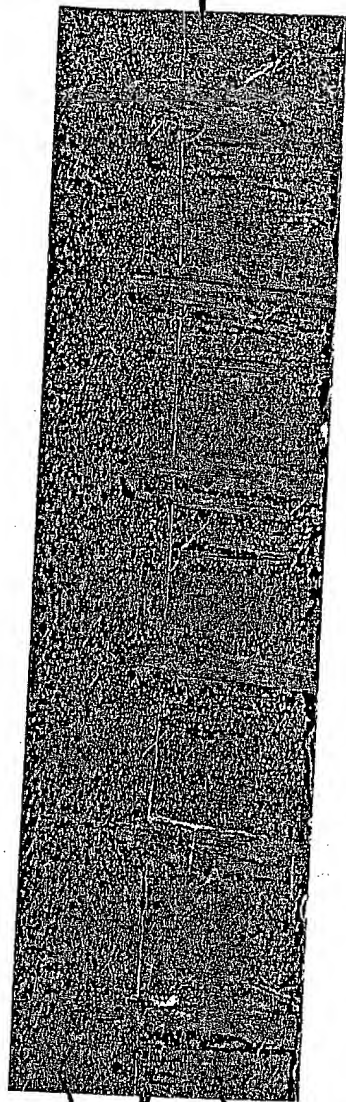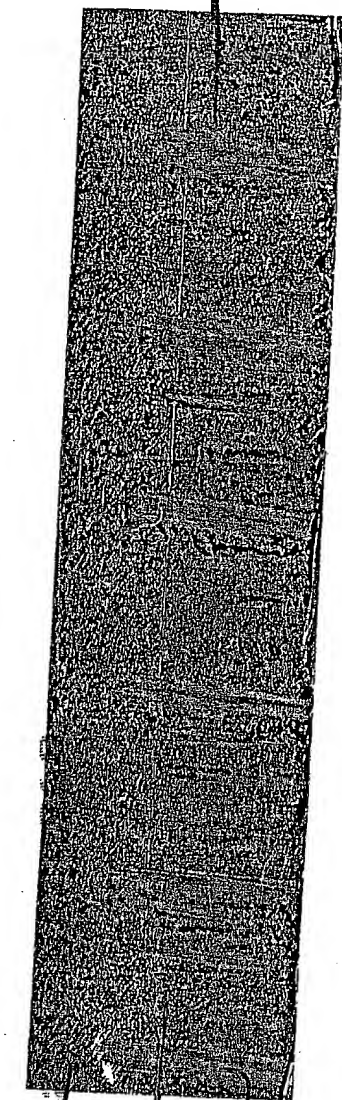


38
40
34

42
44
36

38
44
46

FIG 3



138

BULLET A LEFT HALF

138

BULLET B RIGHT HALF

46



138

BULLET A RIGHT HALF

138

BULLET B LEFT HALF

48

Fig 4